



DTS GmbH

Diamond Tooling Systems



New

Grooving Systems
PCD, CVD-D, UltraDiamond, CBN



- PCD
- CVD-D
- Ultra Diamond
- CBN-H
- CBN-X
- CBN-K



Tool and
Mold Forming

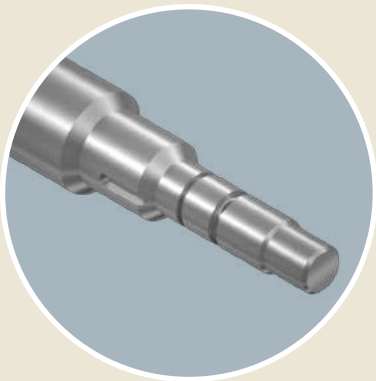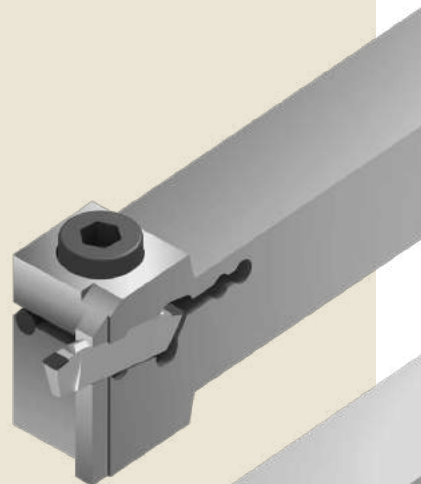


Automotive
Mechanical Engineering

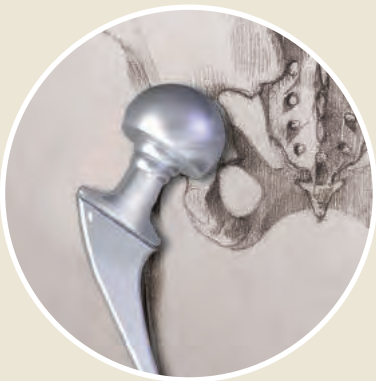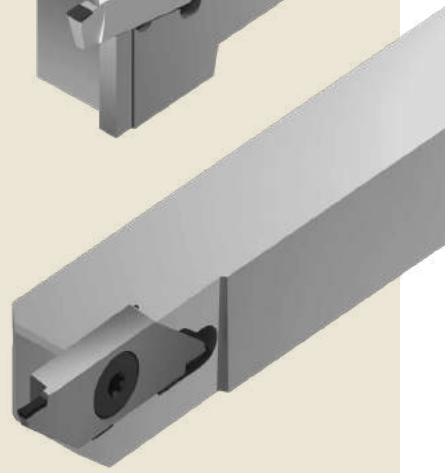

Medical Technology
Microtechnology



Aerospace

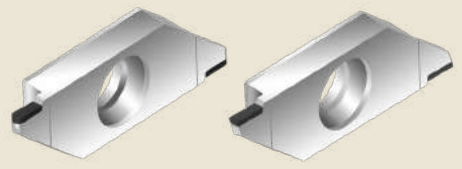


PASSION FOR DIAMOND...

ultrahard cutting materials at a glance



... is not just a slogan for us - we live this passion in our daily dealings with our customers and we are your partner when it comes to diamond or CBN tools.

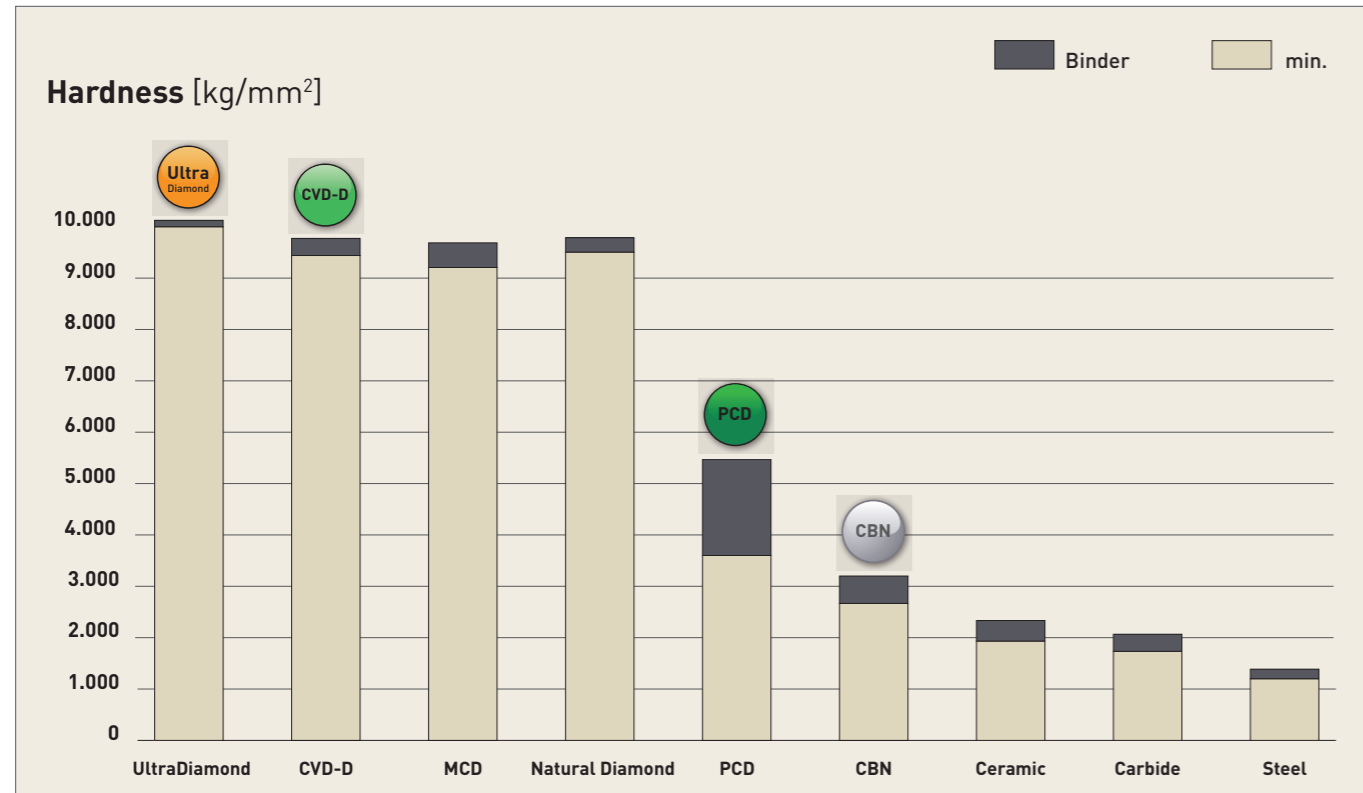

Polycrystalline diamond (PCD)

The well-known Standard Diamond

PCD is a synthetically produced, extremely tough, intergrown mass of diamond particles with a random orientation in a metal matrix. It is produced by sintering selected diamond particles under high pressure and high temperatures.

Graphite serves as a catalyst allowing the PDC crystals to intergrow. PCD has a high thermal conductivity and good heat dissipation away from the cutting edge. In addition, PCD has the highest bending fracture strength of all cutting materials.

PCD is very well suited for machining aluminum with a Si content of up to 12% and/or other abrasive fillers. The thermal hardness is about 750°C. The areas of application are like those of CVD thick-film diamond, but CVD thick film has a higher cost effectiveness with hard-brittle materials or aluminum from a Si content of 12%.

CVD-Thickfilm Diamond (CVD-D)

The Star among Diamond Cutting Materials

For the machining of hard-brittle materials such as Ceramics, glass, glass-Ceramics, tungsten Carbide, MMC and fiber-reinforced composites such as CFRP and GFRP. Due to the lack of a bonding matrix, the diamond content is much higher than with PCD. In the group of ultra-hard cutting materials, binderless CVD-D is one of the hardest man-made diamond cutting materials.

CVD-D is characterized by high hardness as well as high wear resistance. These properties make CVD-D the perfect cutting material for machining abrasive materials. Compared to PCD, which is damaged by the abrasive particles due to its soft metallic binder phase, the CVD-D cutting edge remains stable due to its binderless anchoring in the diamond matrix.

With the correct use of CVD-D, the tool life can be increased by up to 10 times (and even more) compared to PCD!

Binderless Diamond (UltraDiamond)

The hardest Mono Crystal

Single-crystal elements are laser-cut from diamond blanks in a defined orientation using laser segmentation technology. This new technology makes it possible, in addition to polycrystalline cutting materials such as PCD and CVD-D, to also braze a monocrystal (UltraDiamond) under high vacuum on any tool carrier. Compared to PCD, the tool life can be increased by approx. 15 to 25 times and compared to CVD-D by approx. 2 to 5 times.

The areas of application are similar to PCD and CVD-D, but this monocrystalline cutting material offers a further significant increase in tool life in all applications where PCD and CVD-D reach the limits of economic viability. The UltraDiamond cutting material makes economical machining of very hard, highly brittle materials such as Ceramics, glass, glass-Ceramics and hard metals with low cobalt binder and nickel binder (<10%) possible.

Polycrystalline Cubic Boron Nitride (CBN)

Chemically resistant and stable at high temperatures

of up to 1,400°C. Boron nitride powder is the starting point for the production of CBN, which has been available since the end of the 1960s. It is produced under high pressure and at temperatures of over 1,500°C and the many different substrates are specifically adapted to the final application.

CBN is now considered the second hardest material after diamond cutting materials!

The applications of CBN take place in the automotive industry, aerospace, tool and die and mold making as well as in mechanical engineering. The wide range as cutting and abrasive material includes hardened steels, cast irons, chilled Cast Iron, sintered materials, stellites, nickel- and cobalt-based superalloys. In many applications, cubic boron nitride is preferred to diamond cutting materials because it is absolutely stable in air at temperatures up to 1,400°C. Diamond, on the other hand, begins to decompose at a temperature of approx. 750°C.

Compared to PCD, CBN is also characterized by its chemical resistance to ferrous materials.

Our Cutting Material Assignment

about the materials

Benefit from over 25 years of application experience with ultra-hard cutting materials.

In the table you will find our cutting material recommendation for each material.

Green ✓

First choice

Orange ✓

Possible alternative

ISO	Material	PCD	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
H	Powder metallurgical Steel, hardened				✓	✓	
	Special Alloys (ASP,CPM,Hardox)				✓	✓	
	Steel, hardened up to 72 HRC				✓	✓	
	Tool Steel, hardened up to 72 HRC				✓	✓	
P	Sintered Steel					✓	✓
	Sintered Steel, hardened				✓	✓	
K	Grey Cast Iron (GCI)						✓
	Ductile Cast Iron (DCI)					✓	✓
	Shell Chilled Cast Iron				✓	✓	
S	Ni-, Co-, Fe- and Cr-Alloys				✓	✓	
	Titanium Alloys				✓	✓	
M	Stainless Steel, hardened				✓	✓	
N	Acrylic (PMMA)		✓	✓			
	Aluminum, < 10% Si	✓	✓				
	Aluminum, > 10% Si		✓	✓			
	Glass, Glass Ceramic	✓	✓				
	Graphite		✓	✓			
	Carbide G-Grade, < 15% Co		✓				
	Carbide G-Grade, > 15% Co		✓	✓			
	Carbide K-Grade, < 15% Co		✓				
	Carbide K-Grade, > 15% Co	✓					



You cannot find your material in the table?

If you have any further technical questions, please do not hesitate to contact us by phone or e-mail!


Phone: 888.554.7264

Mail: sales@ranitool.com

ISO	Material	PCD	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
N	Carbide (Green)			✓			
	Carbide with Ni Binder		✓	✓			
	Ceramics	✓					
	Ceramics (Green)	✓	✓				
	Plastics	✓	✓				
	Copper, Copper Alloys		✓	✓			
	Magnesium	✓	✓				
	Brass	✓	✓				
	MMC		✓	✓			
	PEEK		✓				
	Silver, Gold, Platinum	✓	✓				
	Composite such as CFG/GFRP		✓	✓			
	Tungsten alloy	✓	✓				
	Zirconium		✓	✓			

Grooving System ECO-Line

Overview and Applications

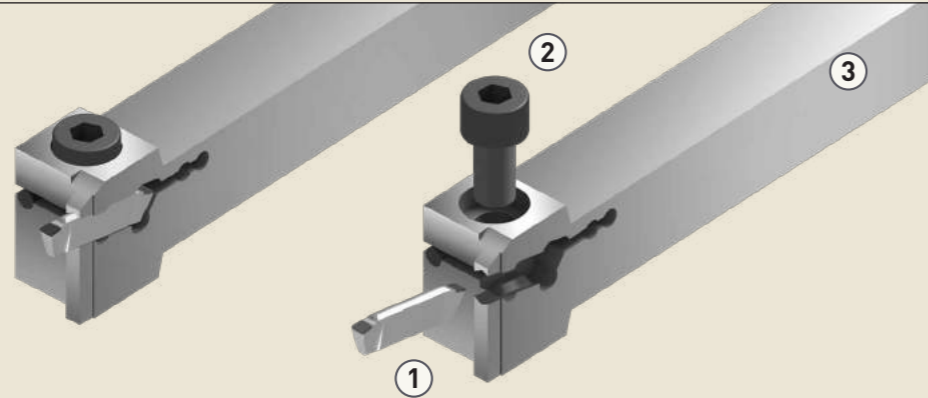


ECO-Line Tool Holder System

- ① Precision machined base body
- ② Screw for clamping the insert
- ③ Low vibration tool holder


ECO-Line - Indexable Grooving Insert

- Laser cut diamond or CBN cutting edge
- High vacuum brazed
- Precision machined carbide base body
- Two cutting edges (Z2)
- In cutting materials: PCD / CVD-D / CBN

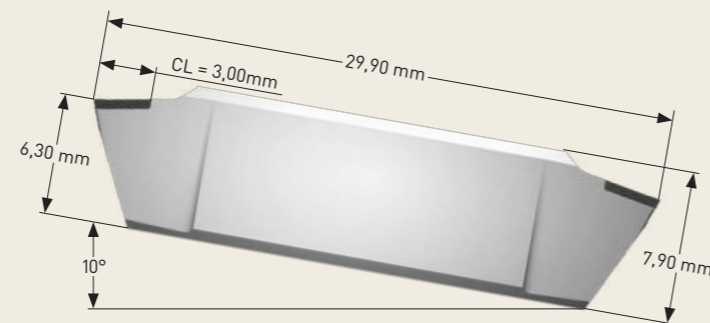

Grooving System MICRO-Line

Overview and Applications


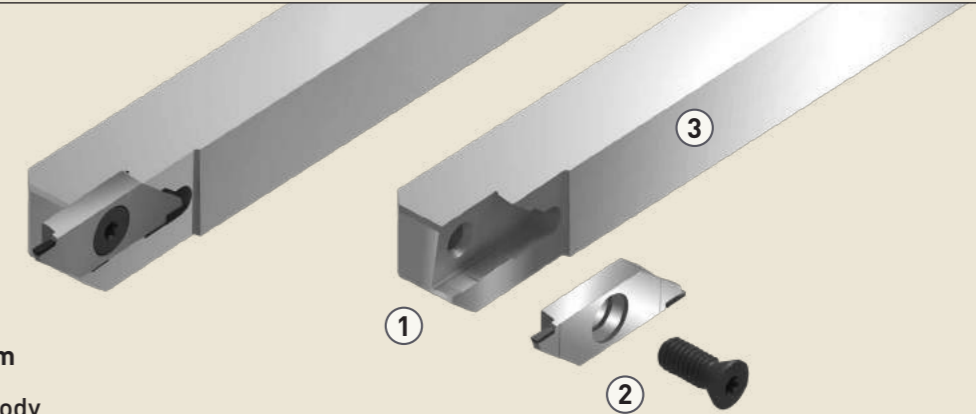


MICRO-Line Tool Holder System

- ① Precision machined base body
- ② Screw for directly clamping the insert
- ③ Precision machined, low vibration tool holder

MICRO-Line - Indexable Grooving Insert

- Laser cut diamond or CBN cutting edge
- High vacuum brazed
- Precision machined carbide base body
- Precision machined center bore
- Tangential clamping provides the best stability
- Two cutting edges (Z2)
- In cutting materials: PCD / CVD-D / UltraDiamond / CBN

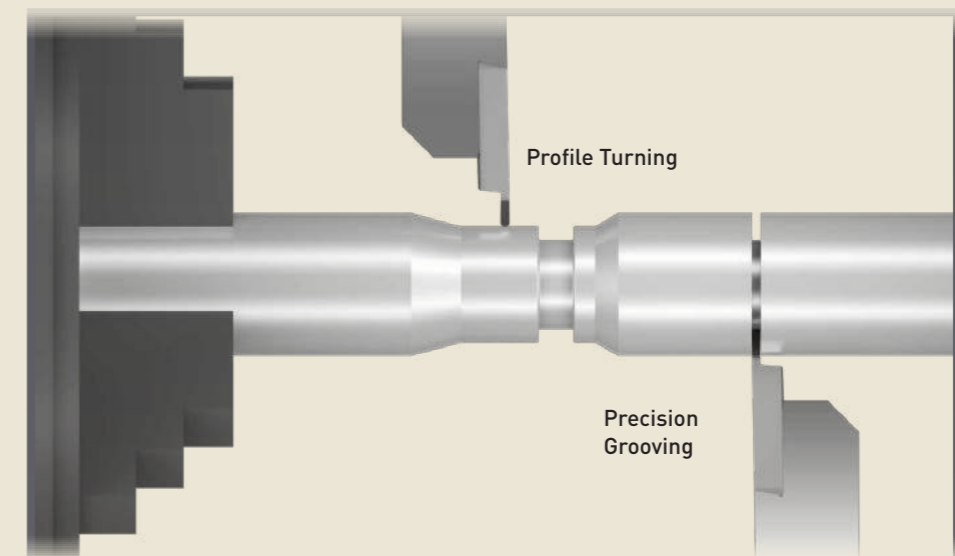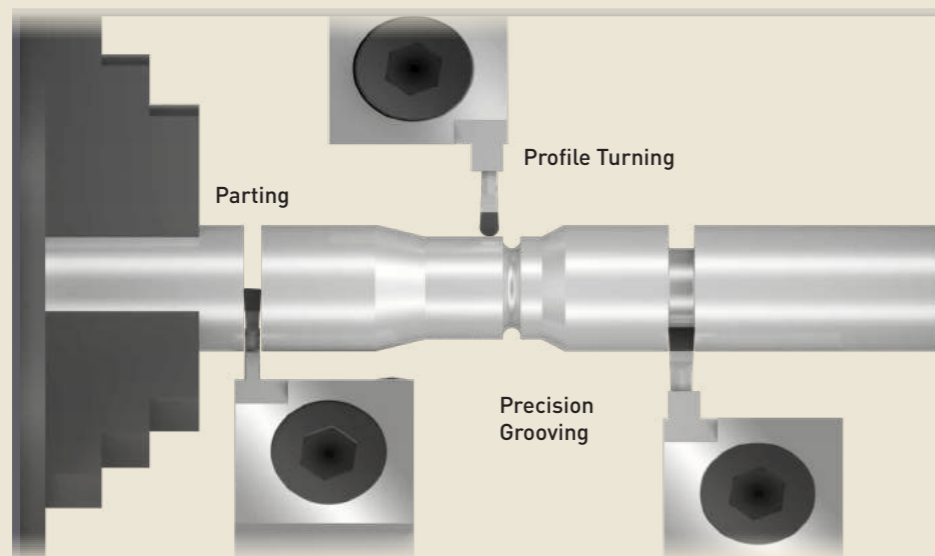


Corner and Full Radius Grooving Inserts

for Grooving, Profile Turning and Parting

ECO-Line System | Toolholder

Benefits:


- Designed for grooving with diamond and CBN cutting materials
- Right and left holders in different dimensions from stock
- Two grooving depths available in stock: 12,00mm and 25,00mm
- For continuous and interrupted cuts

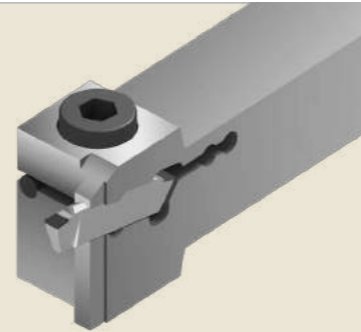

MICRO-Line System | Tool Holder

Benefits:

- Designed for grooving with diamond and CBN cutting materials
- Right side and left side tool holders in different dimensions in stock
- Grooving depth up to 3,80 mm
- For continuous and interrupted cuts
- Stable and precise guiding of the grooving insert
- Easy and quick change of the grooving insert

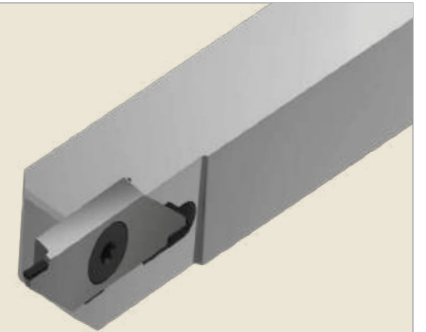

ECO-Line EST and RST System | Corner and Full Radius Grooving Inserts

Benefits:

- Corner grooving insert, width 2,00 mm to 4,00 mm, tolerance +/- 0,01 mm in stock
- Radii from 0,10 mm to 0,20 mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breakers)
- Full radius grooving insert, width 2,00 mm to 6,00 mm, tolerance +/- 0,01 mm in stock
- Full radius from 1,00 mm to 3,00 mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breakers)
- Cutting edge length 3,00 mm



ECO-EST




ECO-RST

MICRO-Line EST and RST System | Corner and Full Radius Grooving Inserts

Benefits:

- Corner grooving insert, width 1,00 mm to 2,00 mm, tolerance +/- 0,01 mm in stock
- Radii from 0,05 mm to 0,20 mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breakers)
- Full radius grooving insert, width 2,00 mm to 6,00 mm, tolerance +/- 0,01 mm in stock
- Full radius from 0,50 mm to 1,00 mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breakers)
- Cutting edge length 3,00 mm



MICRO-EST



MICRO-RST

ECO-Line AST | Parting Inserts

Benefits:

- Parting insert left, width 2,00mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request auch mit Spanleitstufen)
- Parting insert right, width 2,00mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breaker)



ECO-AST-left



ECO-AST-right

You can get the following materials for our grooving systems:




You can get the following materials for our grooving systems:



Grooving Holder System ECO-Line

Clamping Holder

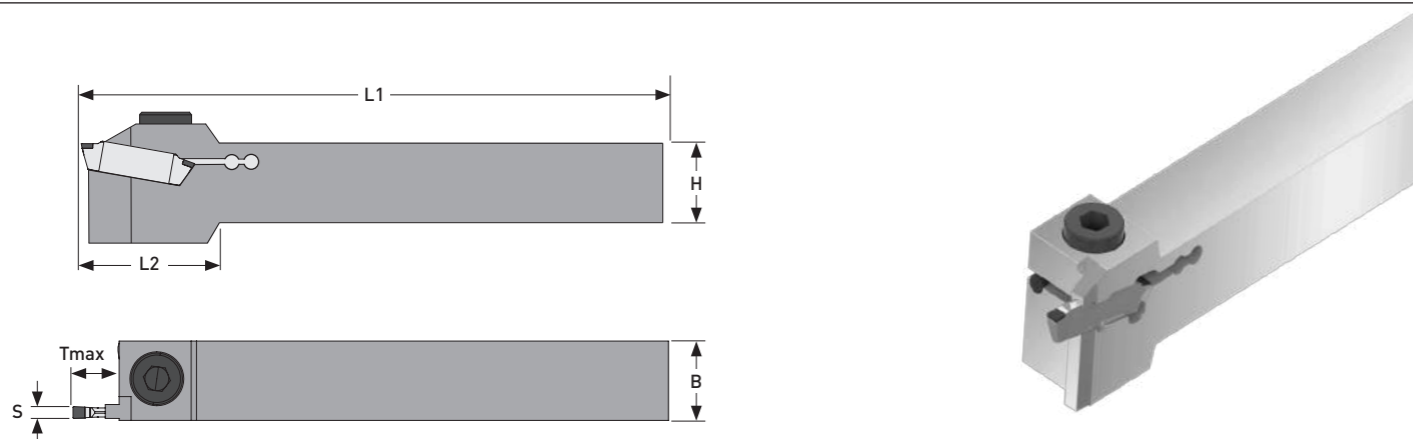

ECO-Line	Grooving holder shank 16x16 for Tmax 12 - 25 available in grooving widths 2,00 -6,00						
B	H	S	L1	L2	Tmax	Version	Item No.
16,00	16,00	2,00-3,00	125,00	35,00	12,00	right	ST7060-1210
16,00	16,00	2,00-3,00	125,00	35,00	12,00	left	ST7060-1211
20,00	20,00	2,00-3,00	150,00	35,00	12,00	right	ST7060-1220
20,00	20,00	2,00-3,00	150,00	35,00	12,00	left	ST7060-1221
25,00	25,00	2,00-3,00	150,00	-	12,00	right	ST7060-1230
25,00	25,00	2,00-3,00	150,00	-	12,00	left	ST7060-1231
20,00	20,00	4,00-5,00	150,00	35,00	12,00	right	ST7060-1420
20,00	20,00	4,00-5,00	150,00	35,00	12,00	left	ST7060-1421
25,00	25,00	4,00-5,00	150,00	-	12,00	right	ST7060-1430
25,00	25,00	4,00-5,00	150,00	-	12,00	left	ST7060-1431
20,00	20,00	6,00	150,00	35,00	12,00	right	ST7060-1620
20,00	20,00	6,00	150,00	35,00	12,00	left	ST7060-1621
25,00	25,00	6,00	150,00	-	12,00	right	ST7060-1630
25,00	25,00	6,00	150,00	-	12,00	left	ST7060-1631
20,00	20,00	2,00-3,00	150,00	45,00	25,00	right	ST7060-3220
20,00	20,00	2,00-3,00	150,00	45,00	25,00	left	ST7060-3221
25,00	25,00	2,00-3,00	150,00	-	25,00	right	ST7060-3230
25,00	25,00	2,00-3,00	150,00	-	25,00	left	ST7060-3231
20,00	20,00	4,00-5,00	150,00	45,00	25,00	right	ST7060-3420
20,00	20,00	4,00-5,00	150,00	45,00	25,00	left	ST7060-3421
25,00	25,00	4,00-5,00	150,00	-	25,00	right	ST7060-3430
25,00	25,00	4,00-5,00	150,00	-	25,00	left	ST7060-3431
20,00	20,00	6,00	150,00	45,00	25,00	right	ST7060-3620
20,00	20,00	6,00	150,00	45,00	25,00	left	ST7060-3621
25,00	25,00	6,00	150,00	-	25,00	right	ST7060-3630
25,00	25,00	6,00	150,00	-	25,00	left	ST7060-3631

Clamping Screw 01-SP9090-0801
Clamping Key 01-SP9095-0160

Application range:


- **PCD** Aluminum < 10% Si, Brass, Graphite coarse-grained, Plastics, Zinc ...
- **CVD-D** Aluminum > 10% Si, Carbide > 8% Co, Copper, GFRP/CFRP, Glass materials, Graphite fine-grained, Titanium (Finishing) ...
- **CBN-H** Steel hardened up to 72 HRC ...
- **CBN-X** Tool Steel up to 72 HRC, Stellite, powder metallurgical Steel, Stainless Steel hardened, Ni-, Co-, Fe- and Cr-Alloys ...
- **CBN-K** Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

You will find further application ranges in the detailed overview from page 8.

Grooving Indexable Insert System ECO-Line

for Grooving, Profile Turning and Parting

ECO-EST

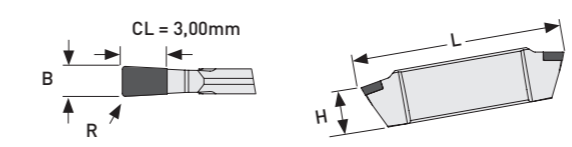


2-cutting edge corner grooving inserts

New	Name	B	R	L	H	PCD	CVD-D	CBN-H	CBN-X	CBN-K
						Item No.	Item No.	Item No.	Item No.	Item No.
	EST-B2	2,00	0,20	29,90	7,90	ST1050-0200	ST2050-0200	ST5050-0200	ST5950-0200	ST5550-0200
	EST-B3	3,00	0,20	29,90	7,90	ST1050-0300	ST2050-0300	ST5050-0300	ST5950-0300	ST5550-0300
	EST-B4	4,00	0,20	29,90	7,90	ST1050-0400	ST2050-0400	ST5050-0400	ST5950-0400	ST5550-0400

We are glad to offer you any special geometries on request.

ECO-RST

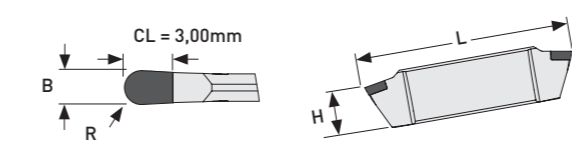


2-cutting edge full radius grooving inserts

New	Name	B	R	L	H	PCD	CVD-D	CBN-H	CBN-X	CBN-K
						Item No.	Item No.	Item No.	Item No.	Item No.
	RST-B2	2,00	1,00	29,90	7,90	ST1050-1200	ST2050-1200	ST5050-1200	ST5950-1200	ST5550-1200
	RST-B3	3,00	1,50	29,90	7,90	ST1050-1300	ST2050-1300	ST5050-1300	ST5950-1300	ST5550-1300
	RST-B4	4,00	2,00	29,90	7,90	ST1050-1400	ST2050-1400	ST5050-1400	ST5950-1400	ST5550-1400
	RST-B5	5,00	2,50	29,90	7,90	ST1050-1500	ST2050-1500	ST5050-1500	ST5950-1500	ST5550-1500
	RST-B6	6,00	3,00	29,90	7,90	ST1050-1600	ST2050-1600	ST5050-1600	ST5950-1600	ST5550-1600

We are glad to offer you any special geometries on request.

ECO-AST

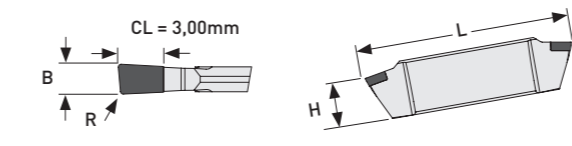

2-cutting edge parting Inserts


New	Name	B	R	L	H	PCD	CVD-D	CBN-H	CBN-X	CBN-K
						Item No.	Item No.	Item No.	Item No.	Item No.
	AST-B2R	2,00	0,20	29,90	7,90	ST1050-0290	ST2050-0290	ST5050-0290	ST5950-0290	ST5550-0290
	AST-B2L	2,00	0,20	29,90	7,90	ST1050-0291	ST2050-0291	ST5050-0291	ST5950-0291	ST5550-0291

We are glad to offer you any special geometries on request.

Subject to technical changes.

Grooving Holder System MICRO-Line

Clamping Holder

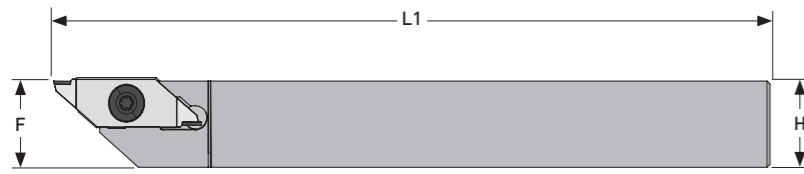

MICRO-Line	B	H	L1	L3	F	F1	Version	Item No.
New	8,00	8,00	125,00	8,00	10,00	10,00	right	ST7060-0010
	8,00	8,00	125,00	8,00	10,00	10,00	left	ST7060-0015
	10,00	10,00	125,00	8,00	10,00	10,00	right	ST7060-0020
	10,00	10,00	125,00	8,00	10,00	10,00	left	ST7060-0025
	12,00	12,00	125,00	8,00	12,00	12,00	right	ST7060-0030
	12,00	12,00	125,00	8,00	12,00	12,00	left	ST7060-0035
	16,00	16,00	125,00	8,00	16,00	16,00	right	ST7060-0040
	16,00	16,00	125,00	8,00	16,00	16,00	left	ST7060-0045
	20,00	20,00	125,00	8,00	20,00	20,00	right	ST7060-0050
	20,00	20,00	125,00	8,00	20,00	20,00	left	ST7060-0055

Clamping Screw	01-SP9090-0410
Clamping Key	01-SP9091-0110

Application range:


- PCD Aluminum < 10% Si, Brass, Graphite coarse-grained, Plastics, Zinc ...
- CVD-D Aluminum < 10% Si, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite ...
- U-Diamond Acrylic, Carbide < 10% Binder, Ceramics, Zircon, ...
- CBN-H Steel hardened up to 72 HRC
- CBN-X Tool Steel up to 72 HRC, Tool Steel low alloyed, Stellite, powder metallurgical Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

You will find further application ranges in the detailed overview from page 8.

Grooving Indexable Insert System MICRO-Line

for Grooving and Profile Turning

MICRO-EST

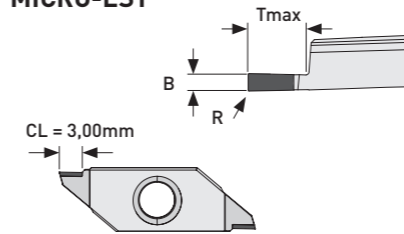


2-edge grooving and profile turning inserts
Figure shows right version

New	Name	Version	B	R	Tmax	PCD	CVD-D	U-Diamond	CBN-H	CBN-X	CBN-K
						Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
	EST-B1	right	1,00	0,05	2,70	ST1050-2100	ST2050-2100	ST1950-2100	ST5050-2100	ST5950-2100	ST5550-2100
	EST-B1	left	1,00	0,05	2,70	ST1050-2101	ST2050-2101	ST1950-2101	ST5050-2101	ST5950-2101	ST5550-2101
	EST-B1	right	1,00	0,10	2,70	ST1050-2102	ST2050-2102	ST1950-2102	ST5050-2102	ST5950-2102	ST5550-2102
	EST-B1	left	1,00	0,10	2,70	ST1050-2103	ST2050-2103	ST1950-2103	ST5050-2103	ST5950-2103	ST5550-2103
	EST-B1,5	right	1,50	0,05	3,80	ST1050-2150	ST2050-2150	ST1950-2150	ST5050-2150	ST1950-2150	ST5550-2150
	EST-B1,5	left	1,50	0,05	3,80	ST1050-2151	ST2050-2151	ST1950-2151	ST5050-2151	ST1950-2151	ST5550-2151
	EST-B1,5	right	1,50	0,10	3,80	ST1050-2152	ST2050-2152	ST1950-2152	ST5050-2152	ST1950-2152	ST5550-2152
	EST-B1,5	left	1,50	0,10	3,80	ST1050-2153	ST2050-2153	ST1950-2153	ST5050-2153	ST1950-2153	ST5550-2153
	EST-B2	right	2,00	0,05	3,80	ST1050-2200	ST2050-2200	ST1950-2200	ST5050-2200	ST5950-2200	ST5550-2200
	EST-B2	left	2,00	0,05	3,80	ST1050-2201	ST2050-2201	ST1950-2201	ST5050-2201	ST5950-2201	ST5550-2201
	EST-B2	right	2,00	0,10	3,80	ST1050-2202	ST2050-2202	ST1950-2202	ST5050-2202	ST5950-2202	ST5550-2202
	EST-B2	left	2,00	0,10	3,80	ST1050-2203	ST2050-2203	ST1950-2203	ST5050-2203	ST5950-2203	ST5550-2203
	EST-B2	right	2,00	0,20	3,80	ST1050-2204	ST2050-2204	ST1950-2204	ST5050-2204	ST5950-2204	ST5550-2204
	EST-B2	left	2,00	0,20	3,80	ST1050-2205	ST2050-2205	ST1950-2205	ST5050-2205	ST5950-2205	ST5550-2205

We are glad to offer you any special geometries on request.

MICRO-RST

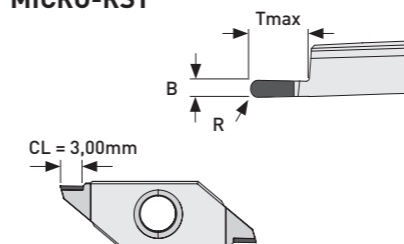

2-edge grooving and profile turning inserts
Figure shows right version

New	Name	Version	B	R	Tmax	PCD	CVD-D	U-Diamond	CBN-H	CBN-X	CBN-K
						Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
	RST-B1	right	1,00	0,50	2,70	ST1050-3100	ST2050-3100	ST1950-3100	ST5050-3100	ST5950-3100	ST5550-3100
	RST-B1	left	1,00	0,50	2,70	ST1050-3101	ST2050-3101	ST1950-3101	ST5050-3101	ST5950-3101	ST5550-3101
	RST-B1,5	right	1,50	0,75	3,80	ST1050-3150	ST2050-3150	ST1950-3150	ST5050-3150	ST5950-3150	ST5550-3150
	RST-B1,5	left	1,50	0,75	3,80	ST1050-3151	ST2050-3151	ST1950-3151	ST5050-3151	ST5950-3151	ST5550-3151
	RST-B2	right	2,00	1,00	3,80	ST1050-3200	ST2050-3200	ST1950-3200	ST5050-3200	ST5950-3200	ST5550-3200
	RST-B2	left	2,00	1,00	3,80	ST1050-3201	ST2050-3201	ST1950-3201	ST5050-3201	ST5950-3201	ST5550-3201

We are glad to offer you any special geometries on request.

Subject to technical changes.


Cutting Parameters

for our Diamond Grooving Inserts – ECO-Line

$V_c \times 3.28 = \text{SFM}$

$A_p / 25.4 = \text{DOC inches}$

$F / 25.4 = \text{inch per revolution}$

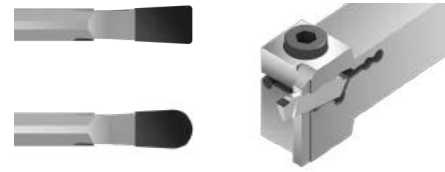

You can use all our grooving inserts in continuous and interrupted cut.

System ECO-Line Cutting Parameters Diamond

Material		PCD				CVD-D				UltraDiamond			
		Continuous		Interrupted		Continuous		Interrupted		Continuous		Interrupted	
		V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]
Acrylic (PMMA)	min.	100	0,005	100	0,005	100	0,005	100	0,005				
	max.	3.000	0,25	2.000	0,10	3.000	0,20	2.000	0,15				
Aluminum <12%Si	min.	100	0,01	100	0,01								
	max.	5.000	0,50	2.000	0,30								
Aluminum >10%Si	min.					100	0,01	100	0,01				
	max.					3.000	0,30	1.500	0,25				
Aluminum >20%Si	min.					100	0,01	80	0,01				
	max.					1.500	0,25	800	0,15				
Brass	min.	100	0,01	100	0,01	100	0,008	100	0,008				
	max.	3.000	0,25	1.500	0,15	5.000	0,20	2.500	0,08				
Carbide G-Grade, >11%Co	min.												
	max.												
Carbide G-Grade, <11%Co	min.												
	max.												
Carbide K-Grade, >15%Co	min.												
	max.												
Carbide K-Grade, <15%Co	min.												
	max.												
Carbide with Ni Binder	min.												
	max.												
Carbide, Green	min.												
	max.												
Ceramics	min.												
	max.												
Ceramics, Green	min.												
	max.												
Composites wie CFRP/GFRP	min.					100	0,01	80	0,008				
	max.					500	0,2	250	0,12				
Copper/Copper Alloys	min.					100	0,01	100	0,01				
	max.					2.000	0,25	1.000	0,15				
Glas, Glass Ceramic	min.												
	max.												
Graphite, coarse-grained	min.	100	0,01	100	0,01								
	max.	4.000	0,50	2.000	0,25								
Graphite, fine-grained	min.					100	0,01	100	0,01				
	max.					5.000	1,00	3.000	0,30				
Gold, Silver, Platinum	min.					50	0,005	30	0,004				
	max.					1.500	0,30	800	0,20				
Magnesium	min.	100	0,01	100	0,01	100	0,008	100	0,008				
	max.	2.000	0,25	1.000	0,15	3.000	0,25	2.000	0,15				
MMC Composites	min.					100	0,02	80	0,01				
	max.					600	0,25	300	0,15				
PEEK	min.	100	0,01	80	0,01								
	max.	300	0,50	220	0,40								
Plastics	min.					100	0,01	100	0,01				
	max.					2.000	0,40	1.500	0,30				
Zircon	min.					50	0,008	30	0,004				
	max.					160	0,05	100	0,02				


Cutting Parameters

for our CBN Grooving Inserts – ECO-Line

$V_c \times 3.28 = \text{SFM}$

$A_p / 25.4 = \text{DOC inches}$

$F / 25.4 = \text{inch per revolution}$

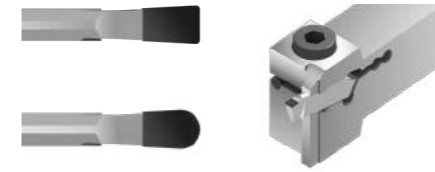

You can use all our grooving inserts in continuous and interrupted cut.

System ECO-Line Cutting Parameters CBN

Material		CBN-H				CBN-X				CBN-K			
		Continuous		Interrupted		Continuous		Interrupted		Continuous		Interrupted	
		V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]	V_c [m/min]	F [mm/rev]
Steel hardened up to 55 HRC	min.	100	0,01	80	0,01								
	max.	220	0,08	160	0,06								
Steel hardened up to 62HRC	min.	80	0,01	60	0,01								
	max.	200	0,08	140	0,06								
Steel hardened up to 72 HRC	min.	60	0,01	60	0,01								
	max.	160	0,06	120	0,04								
Tool Steel hardened up to 72 HRC	min.					80	0,01	40	0,008				
	max.					180	0,05	120	0,04				
Powder metallurgical Steel up to 72 HRC	min.					60	0,01	40	0,008				
	max.					160	0,05	140	0,04				
Carbide-Steel Composite > 20% Co*	min.												
	max.												
Ductile Cast Iron (DCI)	min.									100	0,01	80	0,01
	max.									800	0,10	240	0,06
Grey Cast Iron (GCI)	min.									200	0,01	100	0,01
	max.									2.000	0,20	600	0,06
Hard/Soft Machining	min.	80	0,01	60	0,01								
	max.	280	0,08	140	0,05								
Ni-, Co-, Fe- and Cr-Alloys	min.					80	0,01	60	0,01				
	max.					360	0,06	180	0,05				
Sintered Steel	min.									100	0,01	80	0,08
	max.									300	0,10	160	0,05
Sintered Steel hardened	min.	100	0,008	80	0,008								
	max.	250	0,06	160	0,04								
Stellite (Co-Chrom-Alloys)	min.					80	0,01	60	0,01				
	max.					180	0,08	140	0,05				
Stainless Steel hardened	min.					80	0,01	60	0,01				
	max.					250	0,06	140	0,04				
Titanium Alloys	min.					80	0,008	60	0,008				
	max.					200	0,06	160	0,035				

*for machining carbides we recommend the use of CVD-D cutting edges


Cutting Parameters

for our Diamond Grooving Inserts – MICRO-Line

Vc X 3.28 = SFM

Ap / 25.4 = DOC inches

F / 25.4 = inch per revolution

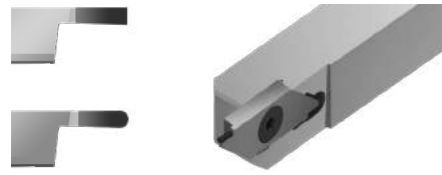

You can use all our grooving inserts in continuous and interrupted cut.

System MICRO-Line Cutting Parameters Diamond

Material		PCD		CVD-D				UltraDiamond					
		V _c	F	V _c	F	V _c	F	V _c	F	V _c	F		
		[m/min]	[mm/rev]	[m/min]	[mm/rev]	[m/min]	[mm/rev]	[m/min]	[mm/rev]	[m/min]	[mm/rev]		
Acrylic (PMMA)	min.	100	0,005	100	0,005	100	0,005	100	0,005	100	0,005	100	0,005
	max.	3.000	0,25	2.000	0,10	3.000	0,20	2.000	0,15	3.000	0,20	2.000	0,15
Aluminium <12%Si	min.	100	0,005	100	0,005								
	max.	5.000	0,30	2.000	0,15								
Aluminum >10%Si	min.					100	0,005	100	0,005				
	max.					3.000	0,25	1.500	0,15				
Aluminum >20%Si	min.					100	0,005	80	0,005				
	max.					1.500	0,18	800	0,12				
Brass	min.	100	0,008	100	0,005	100	0,005	100	0,005				
	max.	3.000	0,15	1.500	0,15	5.000	0,12	2.500	0,10				
Carbide G-Grade, >11%Co	min.												
	max.												
Carbide G-Grade, <11%Co	min.												
	max.												
Carbide K-Grade, >15%Co	min.												
	max.												
Carbide K-Grade, <15%Co	min.												
	max.												
Carbide with Ni Binder	min.												
	max.												
Carbide, Green	min.												
	max.												
Ceramics	min.												
	max.												
Ceramics, Green	min.												
	max.												
Composites such as GFRP / CFRP	min.					100	0,01	80	0,008				
	max.					800	0,15	500	0,10				
Copper / Copper Alloys	min.					100	0,01	100	0,01				
	max.					2.000	0,25	1.000	0,15				
Glass Ceramic	min.									50	0,005	30	0,003
	max.									160	0,015	100	0,01
Graphite, coarse-grained	min.	100	0,01	100	0,008								
	max.	4.000	0,15	2.000	0,10								
Graphite, fine-grained	min.					100	0,01	100	0,008				
	max.					5.000	0,22	3.000	0,12				
Gold, Silver, Platinum	min.					50	0,005	30	0,004	50	0,005	30	0,004
	max.					1.500	0,20	800	0,15	1.500	0,20	800	0,15
Magnesium	min.	100	0,008	100	0,005	100	0,008	100	0,008				
	max.	2.000	0,15	1.000	0,10	3.000	0,12	2.000	0,10				
MMC Composites	min.					100	0,01	80	0,008				
	max.					600	0,15	300	0,10				
PEEK	min.	100	0,01	80	0,01								
	max.	300	0,50	220	0,40								
Plastics	min.					100	0,01	100	0,01				
	max.					2.000	0,30	1.500	0,20				
Zircon	min.					50	0,008	30	0,004				
	max.					160	0,05	100	0,02				

Cutting Parameters

for our CBN Grooving Inserts – MICRO-Line

Vc X 3.28 = SFM

Ap / 25.4 = DOC inches

F / 25.4 = inch per revolution



You can use all our grooving inserts in continuous and interrupted cut.

System MICRO-Line Cutting Parameters CBN

Material		CBN-H		CBN-X				CBN-K					
		V _c	F	V _c	F	V _c	F	V _c	F	V _c	F		
		[m/min]	[mm/rev]	[m/min]	[mm/rev]	[m/min]	[mm/rev]	[m/min]	[mm/rev]	[m/min]	[mm/rev]		
Steel hardened up to 55 HRC	min.	100	0,007	80	0,007								
	max.	220	0,060	160	0,040								
Steel hardened up to 62HRC	min.	80	0,007	60	0,007								
	max.	200	0,060	140	0,040								
Steel hardened up to 72 HRC	min.	60	0,007	60	0,007								
	max.	180	0,040	120	0,030								
Tool Steel hardened up to 72 HRC	min.					80	0,007	40	0,006				
	max.					180	0,035	120	0,028				
Powder metallurgical Steel up to 72 HRC	min.					60	0,007	40	0,006				
	max.					160	0,040	140	0,030				
Carbide-Steel Composite > 20% Co*	min.												
	max.												
Ductile Cast Iron (DCI)	min.									100	0,007	80	0,007
	max.									800	0,070	240	0,040
Grey Cast Iron (GCI)	min.									200	0,007	100	0,007
	max.									2.000	0,140	600	0,040
Hard/Soft Machining	min.	80	0,007	60	0,007								
	max.	280	0,060	140	0,035								
Ni-, Co-, Fe- and Cr-Alloys	min.					80	0,007	60	0,007				
	max.					360	0,040	180	0,035				
Sintered Steel	min.									100	0,007	80	0,060
	max.									300	0,07	160	0,040
Sintered Steel hardened	min.	100	0,006	80	0,006								
	max.	250	0,040	160	0,030								
Stellite (Co-Chrom-Alloys)	min.					80	0,007	60	0,007				
	max.					180	0,060	140	0,040				
Stainless Steel hardened	min.					80	0,007	60	0,007				
	max.					250	0,040	140	0,030				
Titanium Alloys	min.					80	0,006	60	0,006				
	max.					200	0,040	160	0,025				

*for machining carbides we recommend the use of CVD-D cutting edges


Cooling According to Cutting Situation

		Dry	Air	Emulsion	Oil
H	●	4. Choice	3. Choice	1. Choice	2. Choice
	◐	1. Choice	2. Choice		
	◑	1. Choice	2. Choice		
X	●	4. Choice	3. Choice	1. Choice	2. Choice
	◐	2. Choice	1. Choice		
	◑	2. Choice	1. Choice		
K	●	3. Choice	2. Choice	1. Choice	
	◐	2. Choice	1. Choice		
	◑	1. Choice	2. Choice		
PCD	●		3. Choice	1. Choice	2. Choice
	◐		3. Choice	1. Choice	2. Choice
	◑				
CVD-D	●		3. Choice	1. Choice	2. Choice
	◐		3. Choice	1. Choice	2. Choice
	◑				
Ultra Diamond	●		3. Choice	1. Choice	2. Choice
	◐		3. Choice	1. Choice	2. Choice
	◑				

● continuous cut
 ◐ light interrupted cut
 ◑ heavy interrupted cut

Formulas

Grooving

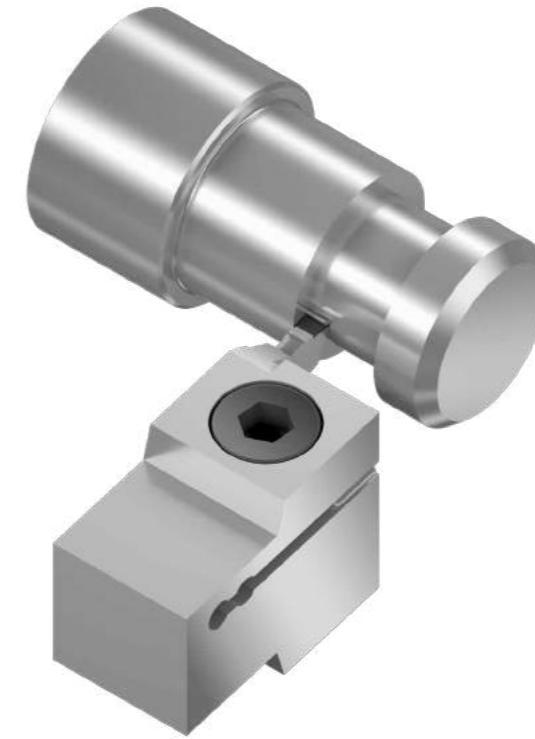

V_f	Feed rate	mm/min
f_n	Feed per revolution	mm/rev
n	Spindle speed	rev/min
v_c	Cutting speed	m/min
D_c	Cutter diameter	mm
t_c	Cutting Time	min
l_m	Cutting length	mm
Q	Stock removal rate	cm ³ /min
a_p	Cutting depth	mm

▶ Cutting speed

$$V_c = \frac{D_c \times \pi \times n}{1000} \quad [\text{m/min}]$$

▶ Spindle speed

$$n = \frac{v_c \times 1000}{\pi \times D_c} \quad [\text{rev/min}]$$

▶ Feed per revolution


$$f_n = \frac{V_f}{n} \quad [\text{mm/rev}]$$

▶ Cutting time

$$t_c = \frac{l_m}{f_n \times n} \quad [\text{min}]$$

▶ Stock removal rate

$$Q = v_c \times a_p \times f_n \quad [\text{cm}^3/\text{min}]$$

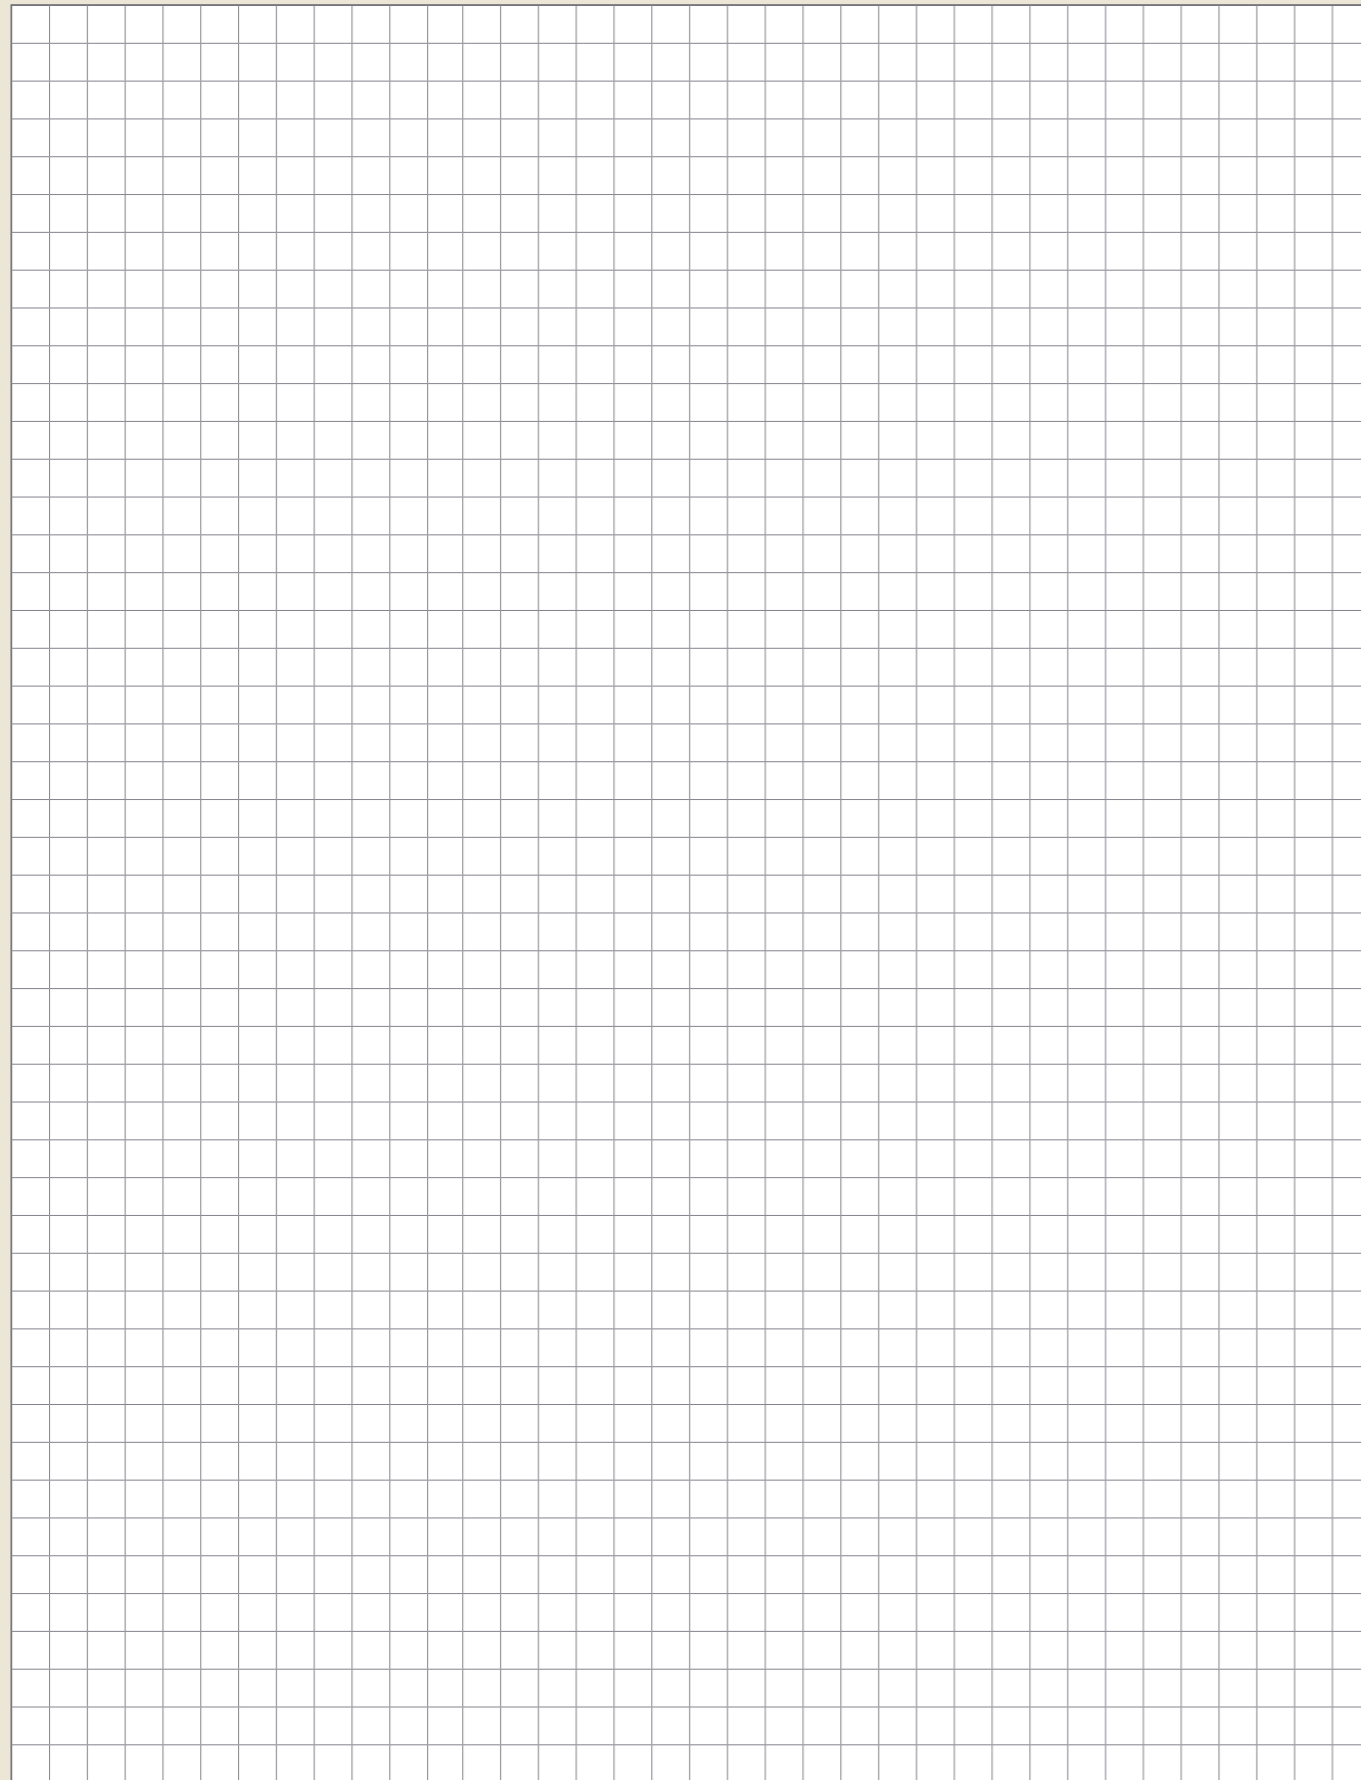

Copyright:


The reprint of our catalogs, copies of our flyers and newsletters or only excerpts such as illustrations, designs, technical information and design require the written permission of Rani Tool Corp. Copies or only excerpts such as illustrations, designs, technical information from our homepage and our online store are only permitted with the written consent of Rani Tool Corp.

All rights are reserved. Errors, misprints or printing errors do not entitle to claims. The pictorial and graphic representation of our tools do not necessarily have to correspond to the actual tool in all details.

We reserve the right to make production-related technical changes and changes to the delivery program. The cutting values given are guide values which must be adjusted according to the process environment.

Safety Instructions:

- ▶ Tools equipped with ultra-hard cutting edges are very sharp laser cut tools.
- ▶ Careful handling of the tools during unpacking and their use is recommended.
- ▶ Wearing protective gloves reduces the risk of injury.
- ▶ Material chipping and tool breakage may occur during machining, wearing safety glasses is recommended.
- ▶ Balanced holders are recommended for speeds above 10,000 rpm.
- ▶ We do not accept any responsibility for tools that have been modified, reground or used incorrectly and beyond their normal service life.
- ▶ Protective goggles are recommended when using tools, sparks may also occur, make sure that no fire can occur.



DTS GmbH

Diamond Tooling Systems
PASSION FOR DIAMOND



Rani Tool Corp.

™ 320 Troy Circle, Unit C, Knoxville, TN 37919

Tel: (865) 337-7799 or (888) 554-RANI • Fax: (865) 337-7716
E-mail: sales@ranitool.com • www.ranitool.com